
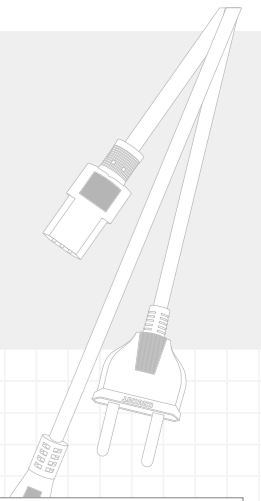




# KABEL SINGLE

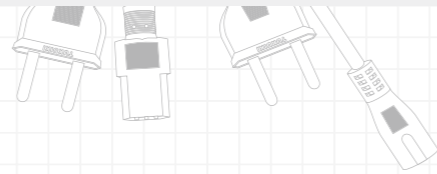

MODEL	1 x 0.5	1 x 7/0.12	1 x 10/0.12	1 x 10/0.31	1 x 12/0.12	
Penghantar Dalam, Kawat/Diameter Penghantar (mm)	1/0.5	7/0.12	10/0.12	10/0.31	12/0.12	
Diameter Penghantar (mm)	0.50	0.37	0.44	0.98	0.48	
Pembungkus Luar (mm)	1.10	1.10	2.65	3.60	1.10	
Berat Kabel (kg/km)	3.71	2.16	9.88	22.37	2.27	
Panjang Standar (m)	50	40, 90, 250, 400, 500	40, 90, 250, 400, 500	40, 90, 250, 400, 500	40, 90, 250, 400, 500	
Panjang Standar dengan Jack (m)	-	-	-	-	-	
Spesifikasi Listrik	Tahanan Penghantar (20 0C) (Ω/km)	-	-	-	-	
	Tegangan (AC/min)	300	300	300	300	
	Tahanan Pembungkus Dalam (MΩ-km)	1000 min.	1000 min.	40 min.	40 min.	40 min.
Spesifikasi Mekanik	Pemuluran Tahanan Penghantar (%)	15	15	15	15	
	Kuat Tarik Isolasi/ Pembungkus Dalam (N/mm <sup>2</sup> )	12.5	6.5	6.5	10.0	6.5
	Pemuluran Isolasi (%)	250	250	200	200	200

MODEL	1 x 12/0.12	1 x 14/0.12	1 x 20/0.12	1 x 20/0.14	1 x 25/0.12	
Penghantar Dalam, Kawat/Diameter Penghantar (mm)	12/0.12	14/0.12	20/0.12	20/0.14	25/0.12	
Diameter Penghantar (mm)	0.48	0.50	0.54	0.72	0.69	
Pembungkus Luar (mm)	2.60	2.70	2.80	3.10	3.30	
Berat Kabel (kg/km)	9.61	10.76	11.98	14.65	16.32	
Panjang Standar (m)	40, 90, 250, 400, 500	40, 90, 250, 400, 500	40, 90, 250, 400, 500	40, 90, 250, 400, 500	40, 90, 250, 400, 500	
Panjang Standar dengan Jack (m)	-	-	-	-	-	
Spesifikasi Listrik	Tahanan Penghantar (20 0C) (Ω/km)	-	-	-	-	
	Tegangan (AC/min)	300	300	300	300	
	Tahanan Pembungkus Dalam (MΩ-km)	40 min.	40 min.	40 min.	40 min.	40 min.
Spesifikasi Mekanik	Pemuluran Tahanan Penghantar (%)	15	15	15	15	
	Kuat Tarik Isolasi/ Pembungkus Dalam (N/mm <sup>2</sup> )	6.5	6.5	6.5	10.0	6.5
	Pemuluran Isolasi (%)	200	200	200	200	200

JENIS KABEL	UKURAN PANJANG (m)	ISI PER DUS (Pcs)
SINGLE 0.5 mm	50	150
SINGLE 1 X 7	40	300
SINGLE 1 X 7	400	25
SINGLE 1 X 10	25	1
SINGLE 1 X 10	25	1
SINGLE 1X10	500	10

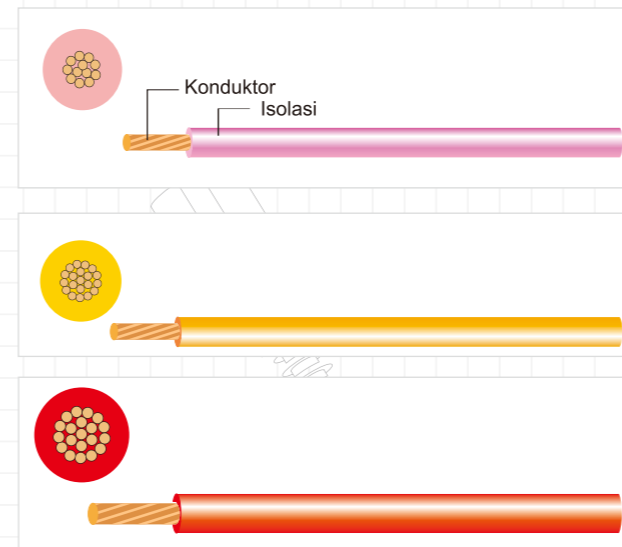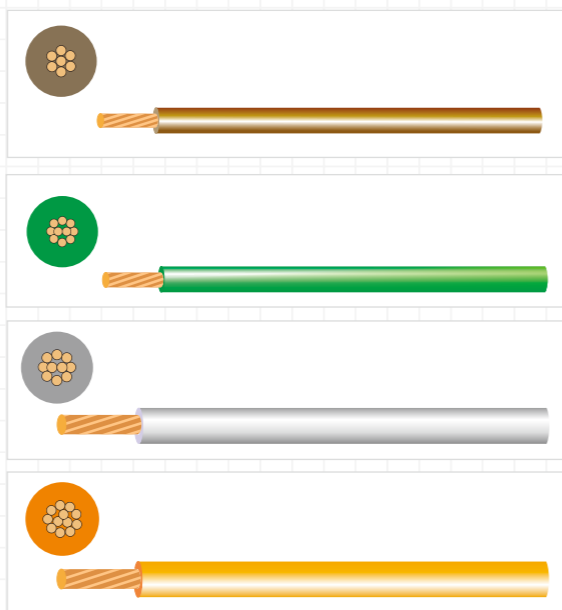

JENIS KABEL	UKURAN PANJANG (m)	ISI PER DUS (Pcs)
SINGLE 1 X 14	90	50
SINGLE 1 X 20	25	1
SINGLE 1 X 20	90	1
SINGLE 1X25(3.3 MM)	25	1
SINGLE 1X25(3.3 MM)	80	1

