


KABEL AUDIO VIDEO

KABEL TF

MODEL		2 x 10/0.12	2 x 10/0.12	2 x 10/0.12
Penghantar Dalam, Kawat/Diameter Penghantar (mm)		2 x 10/0.12	2 x 10/0.12	2 x 10/0.12
Diameter Penghantar (mm)		0.38	0.38	0.38
Pembungkus Luar (mm)		2.05	3.25	3.50
Berat Kabel (kg/km)		14.02	30.79	34.56
Panjang Standar (m)		90, 100	90, 100	90, 100
Panjang Standar dengan Jack (m)		-	-	-
Spesifikasi Listrik	Tahanan Penghantar (20 0C) (Ω/km)	-	-	-
	Tegangan (AC/min)	300	300	300
	Tahanan Pembungkus Dalam (MΩ-km)	20 min.	20 min.	20 min.
Spesifikasi Mekanik	Pemuluran Tahanan Penghantar (%)	15	15	15
	Kuat Tarik Isolasi/ Penghantar Dalam (N/mm ²)	6.5	10.0	6.5
	Pemuluran Isolasi/ Penghantar Dalam (%)	200	225	200

KABEL TF

MODEL		2 x 23/0.12	2 x 30/0.12	2 x 64/0.12
Penghantar Dalam, Kawat/Diameter Penghantar (mm)		2 x 23/0.12	2 x 30/0.12	2 x 64/0.12
Diameter Penghantar (mm)		0.45	0.66	0.96
Pembungkus Luar (mm)		3.30	4.00	4.70
Berat Kabel (kg/km)		34.44	49.94	74.60
Panjang Standar (m)		35, 70, 270	78, 90	70, 90
Panjang Standar dengan Jack (m)		-	-	-
Spesifikasi Listrik	Tahanan Penghantar (20 0C) (Ω/km)	-	-	-
	Tegangan (AC/min)	300	300	300
	Tahanan Pembungkus Dalam (MΩ-km)	20 min.	20 min.	20 min.
Spesifikasi Mekanik	Pemuluran Tahanan Penghantar (%)	15	15	15
	Kuat Tarik Isolasi (N/mm ²)	6.5	6.5	6.5
	Pemuluran Isolasi/ Penghantar Dalam (%)	200	200	200

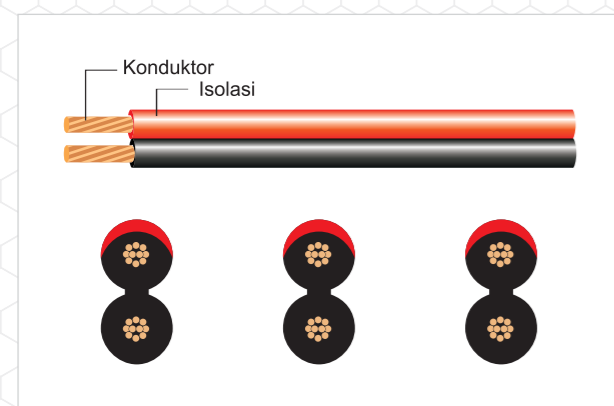

JENIS KABEL	UKURAN PANJANG (m)	ISI PER DUS (Pcs)
TF 2X10/0.12	33m	30
TF 2X10/0.12	60m	15
TF 2X10/0.12	90m	1
TF 2X10/0.12	90m	30
TF 2X10/0.12	125m	30
TF 2X10/0.12	500m	1

JENIS KABEL	UKURAN PANJANG (m)	ISI PER DUS (Pcs)
TF 2X23/0.12	15	200
TF 2X23/0.12	50	20
TF 2X30/0.12	90	15
TF 2X64/0.12	90	10
TF 2X64/0.12	90	10
TF 2X23/0.12	90	15
TF 2X23/0.12	250	1
TF 2X30/0.12	1.000	1

